



# **EP™BONSEAL WB**

## MASONRY SURFACE SEALER

Fourth generation 100% Acrylic / Polyurethane formula. When applied to concrete or any masonry surface the material forms a flexible Surface Sealer.

\*Colour

Milky / White

\*Solubility in water:

\*Specific Gravity:(H20\*Evaporation Rate:Slow\*pH:8.0\*Vapour Density:Hea\*Solubility in Water:Solu\*Percent Volatile by Weight:N/A

Dilutable (H2O =1) 1.2 Slower than ether 8.0 Heavier than Air Soluble N/A

Theoretical Coverage: 8 / 10 m2 per litre

Consists of: 5, 20 and 200 Litre

Shelf Life: 12 months from date of manufacture when maintained in protected storage.

Enviropacific Pty Ltd 2/207 Bank Street East Victoria Park WA 6101 tel: +61 8 9361 8015 email: enviropacific@ozemail.com.au web : www.enviropacific.com



## **APPLICATION INSTRUCTIONS**

### **EP™ BONSEAL WB**

Best by low pressure sprayer, back pack or airless system at 25 psi. Apply continuous coat at approx. 8-10 m2 per litre, depending on porosity of masonry.

Apply once all pre-cleaning has completed and area is dry. Product dries in approx. 1 hour at 25 C, longer during winter, safe to walk on after 2-3 hours, leave overnight for vehicle traffic.

#### **FEATURES**

Water based, non toxic , non hazardous, non flammable , solvent free.

Ready to use, do not dilute material.

Environmentally Safe for all the family.


### NOTES :


The information contained herein is based on data considered accurate, however no warranty is expressed or implied regarding the accuracy of this data. Maintain unused material in sealed containers away from direct sunlight.







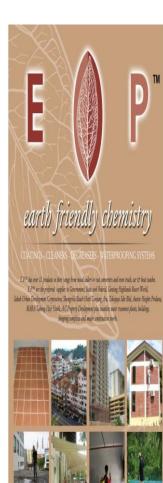





For tehnal dina, podat poplicion, UOS han o et subo face antat por hal EPP operation. Al polar hon a examenentil yel; vas tais, on famulis, on handos esi holgedable. Tahnial das i kad ot dhatany atomi fili taing ore sany yeo. Van do esin EPP polat way it wan poison

 Tel
 : +6088 726 714
 Fax
 : +6088 727 714

 Email
 : sales@epasia.net
 Web site
 : www.epasia.net





